

SETH

Exterior LED surface mounted wall & bollard lights


- Input voltage range: 100-240V AC 50/60Hz
- Constant current driver included
- Material: double anti-corrosion powder coated high-pressure cast aluminium & anti aging UV protected PC diffuser
- LED chips: 8pcs 3030 LED
- Power factor: >0.5
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors
- *Bollard lights can not be used inground
- For bollard lights, to maintain the IP rating please use circular cable in junction
- For bollard lights, for parallel and single connection we recommend using an appropriate IP68 connector (CLA Connector: CONN001 & CONN002)

30,000hr
Lifetime


120°
Beam Angle

IP54
Rated

3YEAR
Replacement
Warranty



SETH1
(Wall Light)

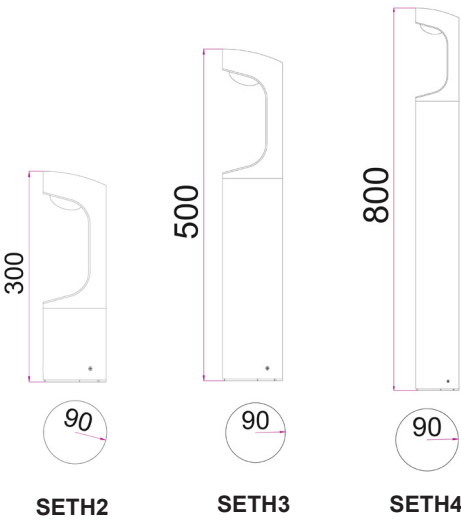

SETH2
(Bollard Light)



SETH3
(Bollard Light)



SETH4
(Bollard Light)

Part No.	Description	Kelvin	Lumens	Watt	PF	CRI	Dimensions	Mounting Plate	Carton QTY
SETH1	WALL LED 240V S/M Matt Black	3000K	428.76LM	9W	>0.5	>80	L 272 x W 90mm		1/8
SETH2	BOLLARD LED Matt Black	3000K	428.76LM	9W	>0.5	>80	H 300mm	Ø90mm	1/9
SETH3	BOLLARD LED Matt Black	3000K	428.76LM	9W	>0.5	>80	H 500mm	Ø90mm	1/9
SETH4	BOLLARD LED Matt Black	3000K	428.76LM	9W	>0.5	>80	H 800mm	Ø90mm	1/9

*These bollards are designed for mounting on a solid surface such as a concrete path or sturdy timber decking

*To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.

*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)